

SWS No.19 - 1/32 Henschel Hs 129 B-3

Inhaltsverzeichnis

Contents / 目次

Teil 1	Flugzeugspezifikationen 実機 諸元 / Actual Aircraft Specifications ————	— 3.
Teil 2	Baustufenübersicht 組み立てについて / Assembly Information	– 4.
Teil 3	-1. Motor エンジン / Engine	– 7.
	-2. Cockpit ವ್ಯಾಶಿಟ್ಗಳ / Cockpit	- 14.
	-3. Rumpf 胴体 / Fuselage	- 20.
	-4. Flügel 主翼 / Wings	- 31.
	-5. Abschließende Bauschritte 最終艤装 / Final Outfitting	41.
Teil 4	Farbgebung und Abziehbilder 塗装とデカール / Painting and Decals —	52 .
Teil 5	Teileübersicht パーツリスト / Parts List	54 .

● Henschel Hs 129 B-3 実機性能諸元 / Actual Aircraft Dimensions, Performance and Characteristics

_	Themseller his 120 i		ctual interact Dimensions, i crioi manee and characteristics			
	·用途: 双発地上攻撃機	・乗員: 1名	·Role: Twin Engine	ed Ground Attack Aircraft	•Crew: 1	
	・全幅: 14.20 m (BK 7,5/75mm対戦車砲は含まず)	·全長: 9.75 m	•Wingspan: 14.2m	(Without BK 7,5 / 75mm anti-tank cannon)	·Length: 9.75m	
	・全高(地上高): 3.25 m ・動力: ノーム・ローン 14M 空冷14気筒 700 hp × 2 ・最高速度: 382 km/h		•Height (From Ground): 3.25m			
			•Power: Gnôme-Rhône 14M $$ 14-cylinder air-cooled two-row radial engine developing 700hp \times 2 $$ •Maximum speed: 382km/h $$			
	·航続距離: 735 km	•実用上昇限度: 9,000 m	·Range: 735km	·Service ceiling:	: 9,000m	
	・武装: MG 17 / 7.92mm機動	☆×2挺 (主翼付け根の固定武装)		7.92 mm MG 17 machine guns (fixed	9 ,	

BK 7.5/75mm anti-tank cannon × 1 (mounted beneath the fuselage)

Teil 1 Flugzeugspezifikationen 1. 実機 諸元 / Actual Aircraft Specifications

ドイツ空軍 ヘンシェル Hs 129 B-3

Luftwaffe Henschel Hs 129 B-3

撃兵器で押し寄せるソ連軍戦車を撃破した「タンクバスター」である。1937年頃、ドイツ 空軍省より提示された「増加装甲・重武装の小型双発攻撃機」という設計要件に対し、ハ ンブルガー、フォッケウルフ、ゴータ、ヘンシェルの4社が競合した結果、フォッケウルフ とヘンシェルが勝ち残った。1939年頃、それぞれの試作原型機が完成。フォッケウルフ 「Fw 189 C」は既存の傑作偵察機「Fw 189」に装甲を施したのみだったのに対し、ヘン シェル「Hs 129」はこの計画のために新たに設計されたものだった。両者は同じエンジ ンながら、増加装甲および重武装専用設計の「Hs 129」と、従来機の改修にすぎない 「Fw 189 C」では全く勝負にならず、比較審査の結果、「Hs 129」が採用された。1940 年秋頃には初期型「Hs 129 A-0」数機が配備されたが、出力不足の問題等が残り、12 機の発注にとどまった。

「Hs 129」のエンジンは、当初、離昇出力459hpのアルグス「As 410 A」空冷倒立V型エ ンジンだったが、総重量5トンの機体に対して双発とはいえ非力だった。すでに第二次大 ノーム・ローン「14 M」14気筒複列星型空冷エンジンの生産に目処が立ち、急遽、このエ ンジン搭載の「Hs 129 B」が量産される事となった。「14 M」は離昇出力700hpで、ま だ出力不足ではあったが、直径950mm、重量400kgとコンパクトながらも、「As 410 A」と比べると格段の性能向上を示した。

固定武装としては、胴体内にMG 151/20mm機銃を、主翼付け根にはMG 17/7.92mm 機銃を各2挺標準搭載。胴体下面にはパレット方式で、MK 101/30mm機関砲やMK 103/30mm機関砲、BK 7.5/75mm対戦車砲などの大口径砲の搭載や各種爆装が可能 である。また、地上からの標的になりにくいようコンパクトに設計された機体は、全長 9.75mと「Ta 152 H」よりも1m短く、全幅も14.2mとわずかに短い。特にB型以降は台形 断面の胴体に直線翼という実に質実剛健の見本のようなデザインとなっており、短い間 隔で配置されたエンジンナセル、カウリングと相まって、小型双発機の機能美を存分に堪 能出来る。また、小型機の割には大きな主翼面積を持っているので、非力なエンジンでも 運動性能はさほど悪くはなく、対地攻撃に的を絞り、整備性の良さなどからも、扱いやす い機体として信頼を高めた。コックピットは台形断面の躯体故か極端に幅が狭く、地上の 対空砲火からパイロットを守るためバスタブ型の装甲板で囲まれ、ウインドシールド直後 には72mm厚の多層防弾ガラスを持つ。計器盤には必要最低限の計器のみで、照準器は コックピット外の機首上に配置。一部の計器はエンジンナセル内側に取り付けられた。本 キットでは、「タンクバスター」としてさらに特化し、胴体下面に航空機搭載用のBK 7,5/75mm対戦車砲×1門を装備した「Hs 129 B-3」を再現可能。用途を絞ることで傑作 機へと昇華した小型双発機の機能美を、「本物の縮尺模型」であるスケールモデルとして どこまで再現できるかの限界に挑戦。共通の武装や計器類の他、搭載兵器によってわず

ヘンシェル「Hs 129」は第二次大戦期のドイツ空軍双発地上攻撃機で、強力な対地攻 The Henschel Hs 129 was a twin engine ground-attack aircraft used by the German Luftwaffe during World War II. It was also known as a "Tank Buster" for its powerful counterattacks against the advancing Soviet tanks. Around 1937, the German Ministry of Aviation issued a specification for a heavily-armed small twin engine fighter with increased armor. The manufacturers Hamburger Flugzeugbau, Focke-Wulf, Gotha, and Henschel were in competition for the commission, with Focke-Wulf and Henschel proposals chosen as contenders. They each completed their prototype aircraft frames around 1939.

While the Focke-Wulf prototype "Fw 189 C" simply added armor to the existing and well-renowned reconnaissance aircraft Fw 189, the Henschel "Hs 129" was a completely new design engineered specifically for the commission. While both used the same engine the Fw 189 C did not stand a chance in comparison to the Hs 129 which was specially designed to have additional armor and to be heavily armed. The Hs 129 was selected for production and the first Hs 129 A-0 aircraft were produced in autumn of 1940. However, the A-0 production was halted at only 12 aircraft due to issues including insufficient power.

The original engines powering the Hs 129 were air-cooled inverted-V type Argus As 410A engines with a take-off power of 459 hp. However, they were simply insufficient to power a five-ton aircraft, even with two engines. World War II had already begun and the top priority 戦が始まり、高性能なエンジンは戦闘機や爆撃機優先だったが、占領下のフランスで、 for high-powered engines was for fighters and bombers. However, once the production in occupied France of the Gnôme-Rhône 14M 14-cylinder two-row air-cooled radial engine became a possibility, it was quickly decided that the Hs 129 B was to be produced powered by those engines instead. The 14M engine had a take-off power of 700 hp, which was still insufficient, but despite its compact size (a 950 mm diameter and only 400kg) its performance was a remarkable improvement over the As 410 A engine

> The standard armament consisted of two 20 mm MG 151 machine guns inside of the fuselage and two 7.92 mm MG 17 machine guns mounted in the wing roots on both sides The underside of the fuselage could be equipped with various types of bombs or heavy-caliber weapons such as the 30 mm MK 101 cannon, 30 mm MK 103 cannon, and 75 mm BK 7,5 anti-tank cannon. At 9.75 m long, the Hs 129 was one meter shorter than the Ta 152 H and had a slightly smaller wingspan of 14.2 m. This compact size made it difficult to target from the ground. The Hs 129 B and later versions in particular had a trapezoidal fuselage with straight wings making it a fine example of simplistic sturdy design. With its closely-situated engine nacelles and cowlings, once can truly appreciate its functional beauty as a small twin-engine aircraft.

> The Hs 129 had a relatively large wing area for a small aircraft, enabling it to have acceptable performance despite insufficient engine power. It gained its trusted reputation from its focus on ground attacks, and ease of maintenance and use. The trapezoidal cockpit was extremely cramped and encased with an armored "bathtub" to protect the pilot from anti-aircraft gunning from the ground. The windscreen was crafted out of multi-layer 72 mm-thick bullet-proof glass. The instrument panel was reduced to only the most vital elements and the gun sight was mounted externally on the nose. Some of the instruments were mounted to the inboard faces of the engine nacelles.

This kit enables the replication of the Hs 129 B-3 version mounted a 7,5/75mm anti-tank cannon beneath the fuselage. With the simplicity and the functional beauty of a small twin-engine aircraft, this kit aims to challenge the very boundaries of how far a scale model can go to be a "miniature model of the actual aircraft." From the standard armament and instrument panel to the mounted weapons, find the true essence of this "Tank Buster" かに異なる差異をSWSキットならではの徹底再現で、「タンクバスター」の神髄に迫ります。 with the minute differences that only can be seen in the thorough replication from SWS kits.

●エンジン / Engine

ノーム・ローン「14 M」/ Gnôme-Rhône 14M

- ·排気量:約19I
- 660ps(3,030rpm)
- ・14気筒複列星型空冷エンジン ・14-cylinder two-row air-cooled radial engine ·Displacement: Approx. 19 I
- ・離昇出力:700ps(3,030rpm) ・Take-Off Power Output: 700 hp (3,030 rpm) ※高度4000mにおける最大出力 *Maximum output at a 4,000 m altitude is 660 hp (3,030 rpm)




当初、非力なアルグス「As 410 A」空冷倒立V型エンジン(離昇出力459hp) だったが、占領下のフランスで、ノーム・ローン「14 M 14気筒複列星型空冷エン ジン(離昇出力700hp)の生産に目処が立ったため、急遽、このエンジンを搭載 した「Hs 129 B」が量産される事となった。まだ出力不足ではあったものの、ア ルグス「As 410 A」と比べると、直径950mm、重量400kgというコンパクトなが らも格段の性能向上を示した。

Originally, Hs 129 was powered by air-cooled inverted-V type Argus As 410A engines (459 hp take-off) which were not powerful enough. Once the production in occupied France of the Gnôme-Rhône 14M 14-cylinder two-row air-cooled radial engine became a possibility, it was quickly decided that the Hs 129 B was to be produced powered by those engines instead. The 14M engine was still not ufficient, but despite its compact size (a 950 mm diameter and only 400kg) its erformance was remarkable improvement over the As 410 A engine.

●武装/ Armament

·BK 7,5 / 75mm 対戦車砲 BK 7.5 / 75mm Anti-Tank Cannon

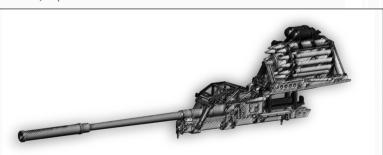

「Hs 129」の固定武装として、通常は主翼の付け根にMG 17/7.92mm機銃×2挺と、胴体側面にMG 151/20mm機銃×2挺を持ち、その他、主翼および胴体下面には最大300kgの爆装も可能で、胴体下面に は様々な兵装オプションが想定された。「タンクバスター」としてさらに特化した「B-3」では、主翼の付け根 にMG 17/7.92mm機統×2挺(本キットで採用のマーキング機体では非搭載)と、胴体下面に航空機搭載 用のBK 7,5/75mm対戦車砲×1門を固定武装とし、BK 7,5の巨大なドラムマガジンを胴体内に収納する ため胴体側面のMG 151は非搭載とされた。本機搭載のBK 7,5は、12発の75mm砲弾を収納した大型の ドラムマガジンを採用し、電磁空気制御による自動装填式を実現。重量700kgにも達するこの巨砲は機体 を鈍重にした反面、その威力はすさまじく、スターリン戦車を一撃で葬る威力があったと言われている。

The fixed armament of the "Hs 129" usually consisted of two MG 17/7.92mm machine guns at the wing roots and two MG 151/20mm machine guns on the sides of the fuselage, up to 300kg of bombs mounted on the wings and beneath the fuselage, and various other armament options were planned to mount beneath the fuselage. The "B-3." which evolved as the ultimate "tank buster" had one BK 7.5/75mm anti-tank annon for aircraft mounting as a fixed armament on the underside of the fuselage, and the MG 151 on the side of the fuselage was not mounted to accommodate the huge drum magazine of the BK 7.5 inside the fuselage. The BK 7,5 mounted on this aircraft employs a large drum magazine that holds 12 75mm shells and is automatically loaded by electromagnetic pneumatic control. Weighing 700 kg, this huge canon made the aircraft slow and heavy, but its power was said to be tremendous. It is said that the canon defeated the IS-2 tanks with a single blow

BK 7,5 / 75 mm対戦車砲 × 1門 (胴体下面武装)