

Illustration

8

Here is an easier and beautiful looking assembly procedure for the nose landing gear, the strut and part C-33. Prepare first, and proceed with 1, 2 and 3.


Assembly order

Preparation

First, prepare the assembly of the nose landing gear and the strut, as shown on the illustration.



Nose Landing Gear

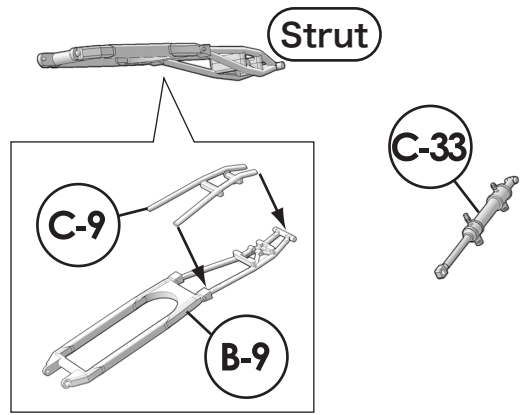


Strut


Assembly order

1


Test-fit part C-33 with the main-frame, and then attach.

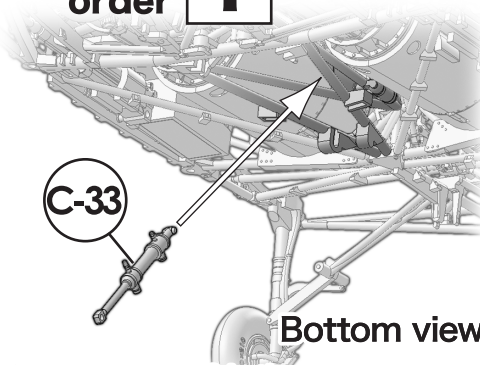

Bottom view

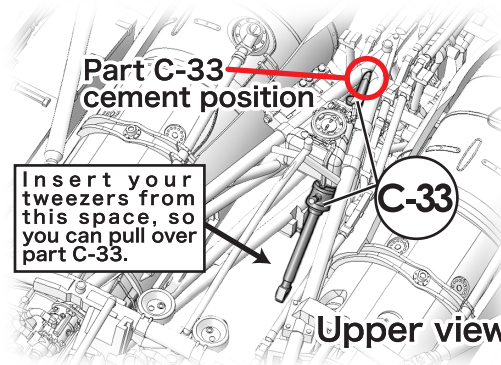

Upper view

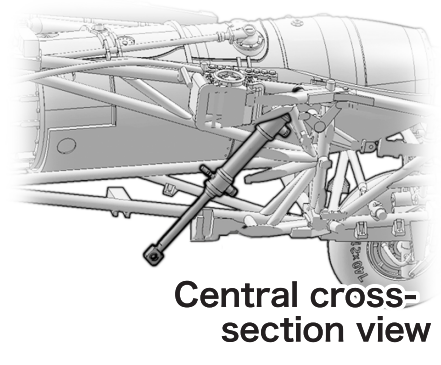

Central cross-section view

① Insert part C-33 in the same orientation as shown in the illustration.

② Attach according to the cement positions described in Illustration ②. Then, test-fit by using a little of cement.


Assembly order

2


Attach the strut without cementing.

① Insert the strut in the correct position. Do not cement at this stage.

② Attach the strut and part C-33 by referring to the right note "Attachment of the strut and part C-33". Do not cement at this stage.

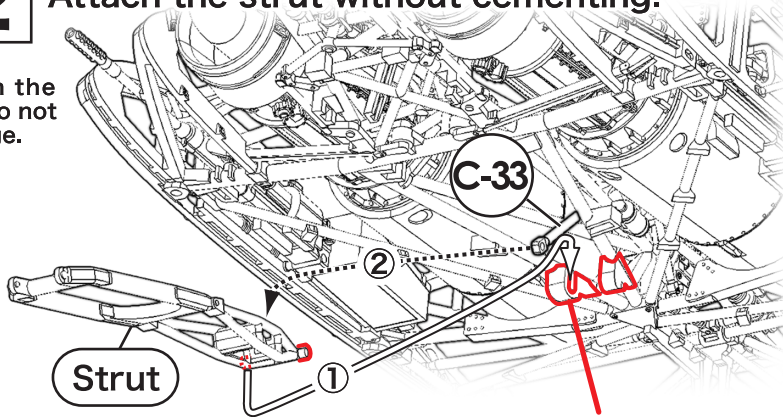

Strut - Attachment position

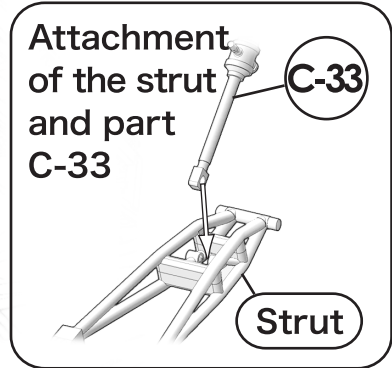

Attachment of the strut and part C-33

Assembly order

3


Cement the nose landing gear.

① Cement and fix the nose landing gear in the right position.

② Attach the strut to the nose landing gear.

③ Cement and fix by tip of part C-33 by using an extra thin cement on the test-fit and attachment areas.

Nose landing gear - Cement position

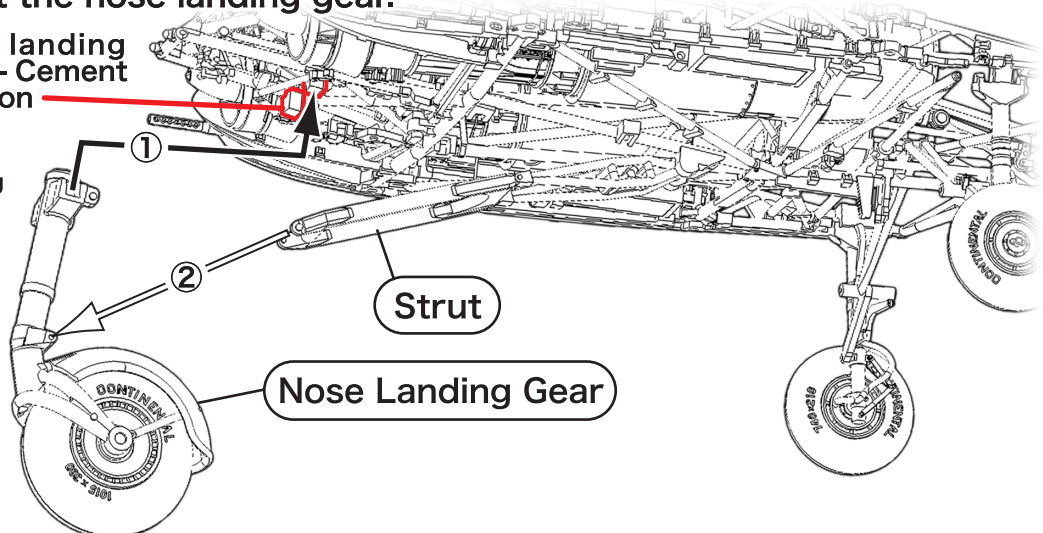

Strut

Nose Landing Gear