

Attention!

- This item is meant for hobbyists 15 years of age or older. Please do not give this item to children under 15.
- Please use these parts with the Zoukei-mura 1/48 F-4 PHANTOM II (J/S type) kit.
- The polyethylene bags that contain the parts and assembly manual present a suffocation risk. Please do not drop the parts or bend them in unintended ways, as they may be damaged.
- In order to properly express the shape of the sculpt, it was unavoidable for some parts to have sharp edges. Please be careful.



http://www.zoukeimura.co.jp/
 Plan & Design: Zoukei-mura, Inc.
 Manufacturer: MDC
 Distributor: VOLKS, Inc.
 http://www.volks.co.jp/en/
 50 Goshoguchi Nakamichi Shitcho-ji,
 Shimogyo-ku, Kyoto Japan 600-8862

SUPER WING OPTIONS



SWS48-05-M01

F-4 PHANTOM II

1/48

F-4J/S Carrier Take-off Metal Struts



1/48 F-4 For 1/48 F-4 kit only.
 ZOUKEI-MURA INC.
 This kit is made of white metal. Please note that these parts cannot be glued with plastic model kit cement. Instant glue should be used instead.
 ZOUKEI-MURA INC. All Rights reserved.




F-4J/S Carrier Take-off Metal Struts



◆◆Important Points for Assembly◆◆

- Before opening the bag, please carefully read this instruction manual and verify that all the parts are included. This set is for the Zoukei-mura 1/48 "F-4" J/S kits. When using this set, please also read the Instruction Manual of the plane's type on which you would like to attach these parts.
 - To build this kit, a big pincher, a cutting knife, sandpaper, waterproof sandpaper, instant glue, and Metal Primer spray are required. Please make sure they are at hand before starting your work.
 - This kit is made of white metal. Parts should be refined. After removing parts' gates with big nippers, remove flash with files and polish the surface with waterproof sandpaper. Because the blade of nippers might break up, please use caution. After roughly sharpening the "parting lines" with the cutting knife and the sandpaper, clean up and polish the surface with waterproof sandpaper. Be careful not to damage the parts.
 - To affix the parts of the kit, please use instant glue. Please do not use glue dedicated to plastic models.
 - Before painting, make a primer coat using the Metal Primer. (Without primer coat, paint may peel.)
 - The recommended brand for painting your kit is the latest line of acrylic paint from Vallejo Color. Please refer to the Zoukei-mura 1/48 "F-4 PHANTOM II" J/S Instruction Manual, Color Guides and U.S. Forces historical manuals to paint the model with the coloring of your choice.
- ※ Please carefully use the tools and the solvents used for assembly and painting by referring to their instruction manuals.

Chart of Included Parts

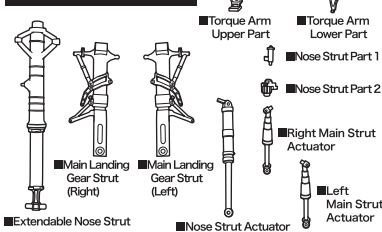

We take the utmost of care when overseeing manufacturing, but if your kit is among the very small percentage that contains a defective part, please contact customer service within two weeks of your purchase with your full name and order number.

Purchasers from VOLKS
 Japan International Web Site:
 Please contact imos@volks.co.jp.
Purchasers from VOLKS USA:
 Please contact service@volksusa.com.


1/48 "F-4" Assembly Instructions

Attach this set's parts when assembling the 1/48 "F-4" J/S kit. The following explanations are in case you use these parts with the 1/48 "F-4S type". Please adjust the assembly to your kit.

◆ Nose Strut Attachment

1/48 F-4S
 Instruction Manual P21

When you build the nose strut, replace E-5 (A-23) with the [Extendable Nose Strut] of this set and assemble. Similarly, replace E-12 (A-19), E-13 (A-20) with [Torque Arm Up/Down], E-11 with [Nose Strut Components:1], E-9 with [Nose Strut Components:2], E-20 with [Nose Strut Actuator] and assemble according to the instruction manual.

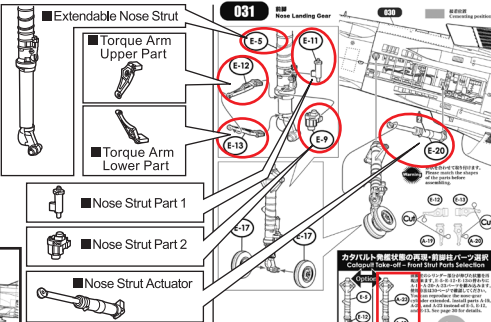

Take-off position




Attaching the extendable nose strut, the aircraft acquires a huge elevation angle.

For all the comments regarding take-off position, see p.30 in S-type instruction manual.

◆ Right Main Strut Attachment

1/48 F-4S
 Instruction Manual P22


When you build the right side of the main strut, replace E-14 with the [Right Main Strut] and E-19 with [Right Main Actuator] of this set and assemble according to the instruction manual.

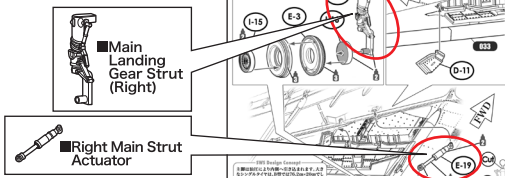

◆ Left Main Strut Attachment

1/48 F-4S
 Instruction Manual P23

When you build the left side of the main strut, replace E-4 with the [Left Main Strut] and E-18 with [Left Main Actuator] of this set and assemble according to the instruction manual.

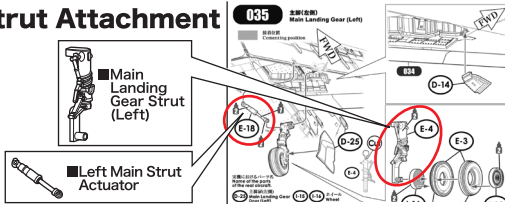

When using the weighted tires parts (sold separately), the accuracy of the kit increases considerably.