

Attention!

This item is meant for hobbyists 15 years of age or older. Please do not give this item to children under 15. This item is intended for use with the Zoukei-mura 1/32 "A-1J Skyraider".

The polyethylene bags that contain the parts and assembly manual present a suffocation risk. Please do not drop the parts or bend them in unintended ways, as they may be damaged. In order to properly express the shape of the sculpt, it was unavoidable for some parts to have sharp edges. Please be careful.




造形村
ZOUKEI-MURA INC.

http://www.zoukeimura.co.jp/
Plan & Design : Zoukei-Mura, Inc.
Distributor : VOLKS, Inc.
http://www.volks.co.jp/en/index.asp
80 Goshonouchi Nakamachi Shinjuku-ku, Shimogyo-ku, Kyoto Japan 600-8862

SUPER WING OPTIONS

ZOUKEI-MURA INC. PRESENTS
SUPER WING SERIES, No.07
SWS SUPER WING SERIES 1/32 DOUGLAS [SWS07-M02]
A-1J SKYRAIDER U.S. AIR FORCE

Weighted Tires



These parts are made of urethane resin. Please be careful during assembly.
Plastic model cement won't work on these parts. Please use a suitable instant glue.

造形村 ZOUKEI-MURA INC. All Rights reserved.
¥1,200 (Including Tax ¥1,260)



Weighted Tires
4 518992 527940
¥1,200 (including Tax ¥1,260)

1/32 "A-1J" Skyraider Air Force Type - Parts Installation Instructions

These parts should be installed while building the 1/32 "A-1J" aircraft kit. Please also refer to the "A-1H" and "A-1J" kit assembly manuals.

Installing the Rear Wheel Tire


1/32 A-1J Modeling Manual **p-03-**
1/32 A-1H Modeling Manual **p-10-**

When building the 1/32 "A-1J," please substitute the weighted rear tire for C-3 (C-1), as shown in the illustration.

Install the weighted rear tire instead of C-3 (C-1).



Install the tire so that the weighted surface is flush against the ground. Please refer to the "Installation Guide" below.

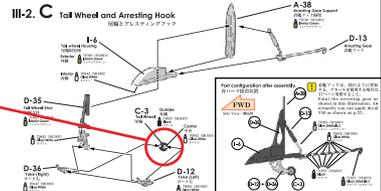


Installing the Main Wheel Tires

When building the 1/32 "A-1J," please substitute the weighted main wheel tires for C-10, as shown in the illustration.

1/32 A-1J Modeling Manual **p-05-**
1/32 A-1H Modeling Manual **p-24-**

III-5. C Main Landing Gears Tires

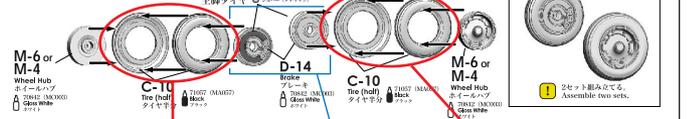


For the main wheel tires, it doesn't matter which part goes on the right or left, but the weighted surfaces should be oriented downward (against the ground). Right or left will be determined by how you attach D-14.

Please take care with the orientation when attaching D-14. It is very important when installing this part that the flattened weighted surfaces of the tires be flush against the ground. At this point, it may be better to leave the parts unglued and only attach D-14 to the struts (refer to page 25 of the A-1H manual), and attach the main wheel tires later, while adjusting to make sure the weighted surfaces are flush.

For instructions on how to attach them to the main landing gear assemblies, please refer to pages 24-25 of the A-1H manual.

Installation Guide

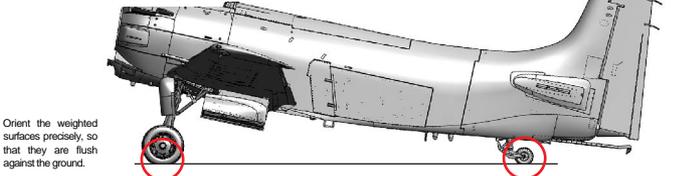

Orient the weighted surfaces precisely, so that they are flush against the ground.

By using these parts in combination with the A-1H "Metal Struts" (sold separately), it is possible to produce a final finish even closer to the actual aircraft.
These parts are also compatible with the A-1J.

Important Points for Assembly

Please carefully read the assembly manual prior to opening and make sure that everything is included.

To use this item, tools such as nippers, craft knife, files, sanding papers, instant glue, etc. are required, so please prepare them.

Please prepare the parts first. You can remove seam lines and gate marks with tools such as nippers, a craft knife and files. Urethane resin is softer than the plastic material used for the kit. So be careful to avoid carving too much. Air bubbles can be filled with putty (epoxy, plastic, etc.) or similar, then finish with sanding paper. In the case that mold details are lost, you can recover them with tools such as spatulas.

For assembly, adjust the direction of each part while checking the balance and pose of your entire kit.


Instant glue should be used for these parts. Please note that they cannot be glued with plastic model kit cement.

Base preparation is needed before painting. Please thoroughly finish the base with a coat of surfacer spray (otherwise, the paint will chip off as time passes.)

With regard to paint, after taking personal safety and the global environment into consideration, we recommend using "Vallejo Colors," acrylic hobby paints for the new century. Please check references regarding the U.S. Air Force at that point and the assembly manual of the 1/32 "A-1J" Skyraider, and finish your Skyraider in your preferred color scheme.

When it comes time to use tools and paints, please carefully follow the individual instructions respective to each tool for your safety.

パーツリスト

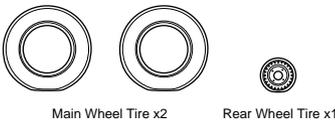

We take the utmost of care when overseeing manufacturing, but if your kit is among the very small percentage that contains a defective part, please contact customer service within two weeks of your purchase with your full name and order number.

Purchasers from VOLKS Japan International Web Site:
Please contact imos@volks.co.jp.
Purchasers from VOLKS USA:
Please contact service@volksusa.com.