

### Attention!

- This item is meant for hobbyists 15 years of age or older. Please do not give this item to children under 15.
- This item is intended for use with the Zoukei-mura 1/48 "J7W1 SHINDEN".
- The polyethylene bags that contain the parts and assembly manual present a surfacation risk. Please do not drop the parts or bend them in unintended ways, as they may be damaged.
- In order to properly express the shape of the sculpt, it was unavoidable for some parts to have sharp edges. Please be careful.



**造形村**  
ZOUKEI-MURA INC.  
<http://www.zoukeimura.co.jp/>  
Plan & Manufacturer: Zoukei-Mura, Inc.  
Design: JMC  
Distributor: VOLKS, Inc.  
<http://www.volks.co.jp/en/index.aspx>  
60 Gokisocho-1 Nakasone-cho, Shinjyo-ku, Kyoto Japan 600-8862

## SUPER WING OPTIONS



SWS48-01-M02  
Imperial Japanese Navy  
Interceptor

**SUPER WING SERIES**  
**1/48 SHINDEN**  
No.1

## Weighted Tires



**造形村**  
ZOUKEI-MURA INC.  
This is a resin kit. Please note that parts cannot be glued with plastic model kit cement. Instant glue should be used instead.



### Important Points for Assembly

Please carefully read the assembly manual prior to opening and make sure that everything is included.

To use this item, tools such as: nippers, craft knife, files, sanding papers, instant glue, etc., are required, so please prepare them.

Please prepare the parts first. You can remove seam lines and gate marks with tools such as nippers, a craft knife and files. Urethane resin is softer than the plastic material used for the kit, so be careful to avoid carving too much. Air bubbles can be filled with putty (epoxy, plastic, etc.) or similar, then finished with sanding paper. In the case that mold details are lost, you can recover them with tools such as spatulas.

During assembly, adjust the orientation of each part while checking the balance and pose of the entire kit. Instant glue should be used for these parts. Please note that they cannot be glued with plastic model kit cement.


We recommend using brass wire (sold separately) to reinforce the areas where the parts are glued together. Use a pin vise and drill bit to open a hole on both sides of each gluing surface, then insert the ends of a brass wire into the holes to connect the sides. This will greatly increase the strength of each joint. (Using the wires without glue to temporarily build a figure is called dry fitting. We recommend doing so in order to check each figure's balance.) Base preparation is required before painting. Please thoroughly finish the base with a coat of surfacer spray (otherwise, the paint will chip off as time passes).

The recommended brand for painting your kit is the latest line of paint from Vallejo Color, due to its non-toxicity and environmental friendliness. While referring to resources on historical Imperial Japanese Navy, you may paint the model with the coloring of your choice.

When it comes time to use tools and paints, please carefully follow the individual instructions respective to each tool for your safety.

### Chart of Included Parts

Please check the attach position of the brake pipes to differentiate left and right main struts and tires.

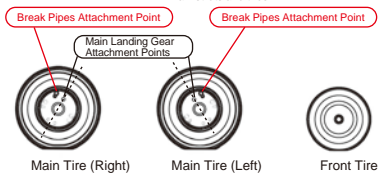

We take the utmost of care when overseeing manufacturing, but if your kit is among the very small percentage that contains a defective part, please contact customer service within two weeks of your purchase with your full name and order number.

Purchasers from VOLKS  
Japan International Web Site:  
Please contact [imos@volks.co.jp](mailto:imos@volks.co.jp).  
Purchasers from VOLKS USA:  
Please contact [service@volksusa.com](mailto:service@volksusa.com).

### 1/48 "J7W1 SHINDEN" Assembly Instructions


These parts will be inserted when assembling the 1/48 "J7W1 SHINDEN" kit. Please refer to the instruction manual of the "J7W1 SHINDEN."

### 1/48 J7W1 SHINDEN Instruction Manual P.13

## Front Tire Assembly

In order to assemble the 1/48 Shinden front tire, replace part D-12 with the " front tire " included on this set.

Front Tire to be replaced

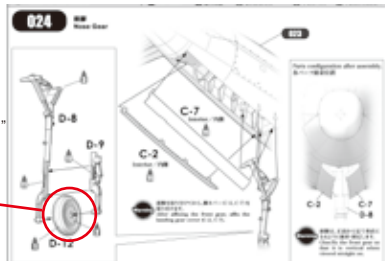


## Main Tire (Right) Assembly

In order to assemble the 1/48 Shinden main tire (right), replace part D-3 with the " main tire (right) " included on this set.

Main Tire (Right) to be replaced

Break Pipes Attachment Point

Main Landing Gear Attachment Points

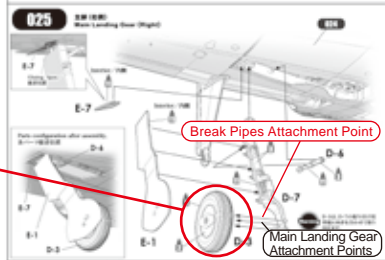

### 1/48 J7W1 SHINDEN Instruction Manual P.14


## Main Tire (Left) Assembly

In order to assemble the 1/48 Shinden main tire (left), replace part D-5 with the " main tire (left) " included on this set.

Main Tire (Left) to be replaced

Break Pipes Attachment Point

Main Landing Gear Attachment Points

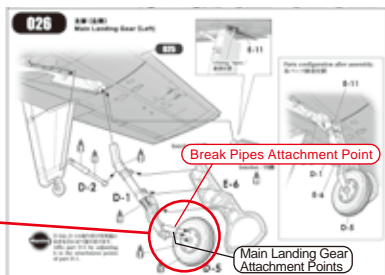

Additionally affixing the separately sold " Metal struts " part will increase the stability and strength of the kit.