

# Attention!

- This item is meant for hobbyists 15 years of age or older. Please do not give this item to children under 15.
- This item is intended for use with the Zoukei-mura 1/32 "SHINDEN".
- The polyethylene bags that contain the parts and assembly manual present a suffocation risk. Please do not drop the parts or bend them in unintended ways, as they may be damaged.
- In order to properly express the shape of the sculptures, it was unavoidable for some parts to have sharp edges. Please be careful.

This is a resin kit. Please note that these parts cannot be glued with plastic model kit cement. Instant glue should be used instead.

# SUPER WING OPTIONS



SWS01-F02

1/32 ZOUKEI-MURA INC. PRESENTS  
SUPER WING SERIES No.01  
Imperial Japanese Navy Interceptor  
J7W1 SHINDEN

## Forward Facing Pilot Figure



Exclusive Pilot Figure



Photo shows assembled and aren't painted sample. Cockpit is not included.

©ZOUKEI-MURA INC. All Rights reserved.

造形村  
ZOUKEI-MURA INC.  
https://www.zoukeimura.co.jp/  
Zoukei-Mura Inc.  
Distributors: VOLKS USA  
60 Goshonouchi Nakamachi, Shichi-jo,  
Shimogyo-ku, Kyoto Japan 600-8862

Forward Facing Pilot Figure




4 518992 503219

## Important Points for Assembly

- Please carefully read the assembly manual prior to opening and make sure that everything is included.
- To use this item, tools such as ●Nippers, ●craft knife, ●files, ●sanding papers, ●instant glue, etc., are required, so please prepare them.
- Please prepare the parts first. You can remove seam lines and gate marks with tools such as nippers, a craft knife and files. Urethane resin is softer than the plastic material used for the kit, so be careful to avoid carving too much. Air bubbles can be filled with putty (epoxy, plastic, etc.) or similar, then finished with sanding paper. In the case that mold details are lost, you can recover them with tools such as spatulas.
- During assembly, adjust the orientation of each part while checking the balance and pose of the entire kit.
- Instant glue should be used for these parts. Please note that they cannot be glued with plastic model kit cement.
- We recommend using brass wire (sold separately) to reinforce the areas where the parts are glued together. Use a pin vise and drill bit to open a hole on both sides of each gluing surface, then insert the ends of a brass wire into the holes to connect the sides. This will greatly increase the strength of each joint. (Using the wires without glue to temporarily build a figure is called dry fitting. We recommend doing so in order to check each figure's balance.)
- Base preparation is required before painting. Please thoroughly finish the base with a coat of surface spray (otherwise, the paint will chip off as time passes).
- The recommended brand for painting your kit is the latest line of paint from Vallejo Color, due to its non-toxicity and environmental friendliness. While referring to resources on historical Imperial Japanese Navy aircrafts, you may paint the model with the coloring of your choice.

※When it comes time to use tools and paints, please carefully follow the individual instructions respective to each tool for your safety.

## Chart of Included Parts

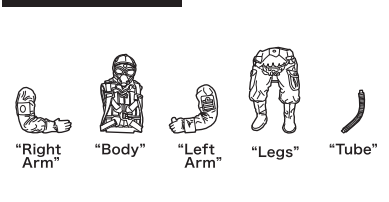

We take the utmost of care when overseeing manufacturing, but if your kit is among the very small percentage that contains a defective part, please contact customer service within two weeks of your purchase with your full name and order number.


Purchasers from VOLKS Japan International Web Site : Please contact imos@volks.co.jp  
Purchasers from VOLKS USA : Please contact service@volksusa.com

## 1/32 "SHINDEN" Assembly Instructions

These parts will be inserted when assembling the 1/32 "SHINDEN" kit. Please refer to the instruction manual of the "SHINDEN".

## Pilot Assembly

Assemble this pilot figure and see page 11 of the 1/32 Shinden instruction manual for the cockpit assembly.

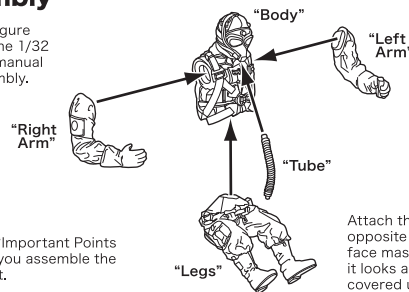


Pay attention to the "Important Points for Assembly" when you assemble the resin parts of this set.

Attach the tube's opposite side from the face mask in a way that it looks as if the rest is covered under the arm.


## How to Insert the Pilot in the Aircraft

Put the pilot's right hand on the control stick.

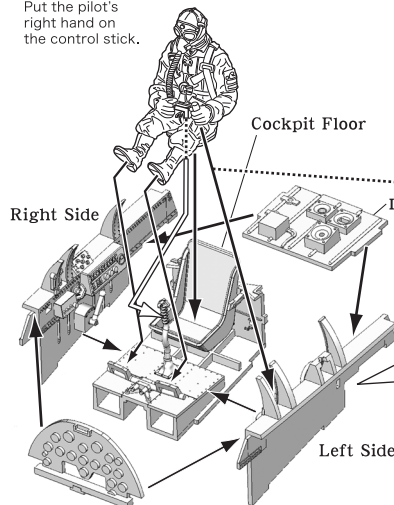

1/32 J7W1 SHINDEN Instruction Manual P.12

Cut off the grip of the throttle lever and attach the left hand.



Reference:  
1/32 J7W1 SHINDEN Instruction Manual P.11

Use the D-33 seat part (without seatbelt) with the pilot figure.