

### Attention!

- This item is meant for hobbyists 15 years of age or older. Please do not give this item to children under 15.
- This item is intended for use with the Zoukei-mura 1/32 "J2M3 RAIDEN"
- The polyethylene bags that contain the parts and assembly manual present a suffocation risk. Please do not drop the parts or bend them in unintended ways, as they may be damaged.
- In order to properly express the shape of the sculpts, it was unavoidable for some parts to have sharp edges. Please be careful.



<http://www.zoukeimura.co.jp/>  
● Plan & Manufacturer : Zoukei-Mura, Inc.  
● Distributor : VOLKS, Inc.  
<http://www.volks.co.jp/en/index.aspx>  
60 Goshoncho Nakamachi Shinjyuku Shimogyo-ku, Kyoto Japan 600-8882

## SUPER WING OPTIONS

ZOUKEI-MURA INC. PRESENTS SUPER WING SERIES. No.05 [SWS05-M02]

### 1/32 雷電 RAIDEN

Imperial Japanese Navy Interceptor J2M3

## Weighted Tires

These are extra parts to be used with the "J2M3 RAIDEN" kit.

These parts are made of urethane resin. Please be careful during assembly. Plastic model cement won't work on these parts. Please use a suitable instant glue.

● Plan & Manufacturer : Zoukei-Mura, Inc.  
● Distributor : VOLKS, Inc.

## SUPER WING OPTIONS

ZOUKEI-MURA INC. PRESENTS SUPER WING SERIES. No.06 [SWS06-M01]

### 1/32 雷電 RAIDEN

Imperial Japanese Navy Interceptor J2M3

## Weighted Tires

4 518992 223629

## 1/32 " J2M3 RAIDEN " Assembly Instructions

These parts will be inserted when assembling the 1/32 " J2M3 RAIDEN " kit. Please refer to the instruction manual of the " J2M3 RAIDEN ".


1/32 J2M3 RAIDEN  
Instruction Manual p.24

### Insertion of Tail Wheel

When assembling the 1/32 Raiden, instead of using part B-9, insert the tail wheel included in this set.



Tail Wheel

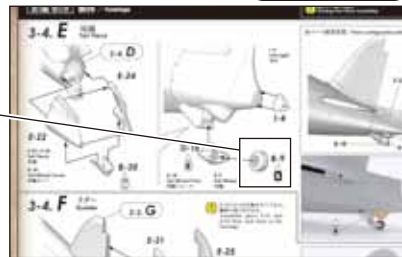

The overall weight of the aircraft distorts the shape of the tail wheel, so the tail wheel has a flat surface. When fixing the tail wheel, please make sure the position and put the flat side on the ground.

### Insertion of Tire

1/32 J2M3 RAIDEN  
Instruction Manual p.24


When assembling the 1/32 Raiden, instead of using part B-3, insert the main gear tires (right and left) included in this set.



Tire



Tire

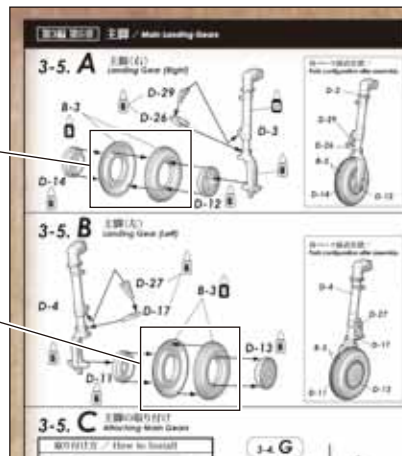

The overall weight of the aircraft distorts the shape of the main gear tires, so the main gear tires have a flat surface. When fixing the tires, please make sure the position and put the flat side on the ground.

Additionally affixing the separately sold " Metal struts " part will increase the stability and strength of the kit.

### Important Points for Assembly

Please carefully read the assembly manual prior to opening and make sure that everything is included.

To use this item, tools such as nippers, craft knife, files, sanding paper, instant glue, etc. are required, so please prepare them. Please prepare the parts first. You can remove seam lines and gate marks with tools such as nippers, a craft knife and files. Urethane resin is softer than the plastic material used for the kit, so be careful to avoid carving too much. Air bubbles can be filled with putty (epoxy, plastic, etc.) or similar, then finished with sanding paper. In the case that mold details are lost, you can recover them with tools such as spatulas.

During assembly, adjust the orientation of each part while checking the balance and pose of the entire kit.

Instant glue should be used for these parts. Please note that they cannot be glued with plastic model kit cement.

We recommend using brass wire (sold separately) to reinforce the areas where the parts are glued together. Use a pin vise and drill bit to open a hole on both sides of each gluing surface, then insert the ends of a brass wire into the holes to connect the sides. This will greatly increase the strength of each joint. (Using the wires without glue to temporarily build a figure is called dry fitting. We recommend doing so in order to check each figure's balance.)

Base preparation is required before painting. Please thoroughly finish the base with a coat of surfacer spray (otherwise, the paint will chip off as time passes).

The recommended brand for painting your kit is the latest line of paint from Vallejo Color, due to its non-toxicity and environmental friendliness. While referring to resources on historical Imperial Japanese Navy, you may paint the model with the coloring of your choice.

When it comes time to use tools and paints, please carefully follow the individual instructions respective to each tool for your safety.

### Chart of Included Parts



Tire x 2



Tail Wheel

We take the utmost of care when overseeing manufacturing, but if your kit is among the very small percentage that contains a defective part, please contact customer service within two weeks of your purchase with your full name and order number.

Purchasers from VOLKS  
Japan International Web Site:  
Please contact [imos@volks.co.jp](mailto:imos@volks.co.jp).  
Purchasers from VOLKS USA:  
Please contact [service@volksusa.com](mailto:service@volksusa.com).